



SEAL

CLINTON COUNTY - LAW ENFORCEMENT CENTER






CLINTON COUNTY

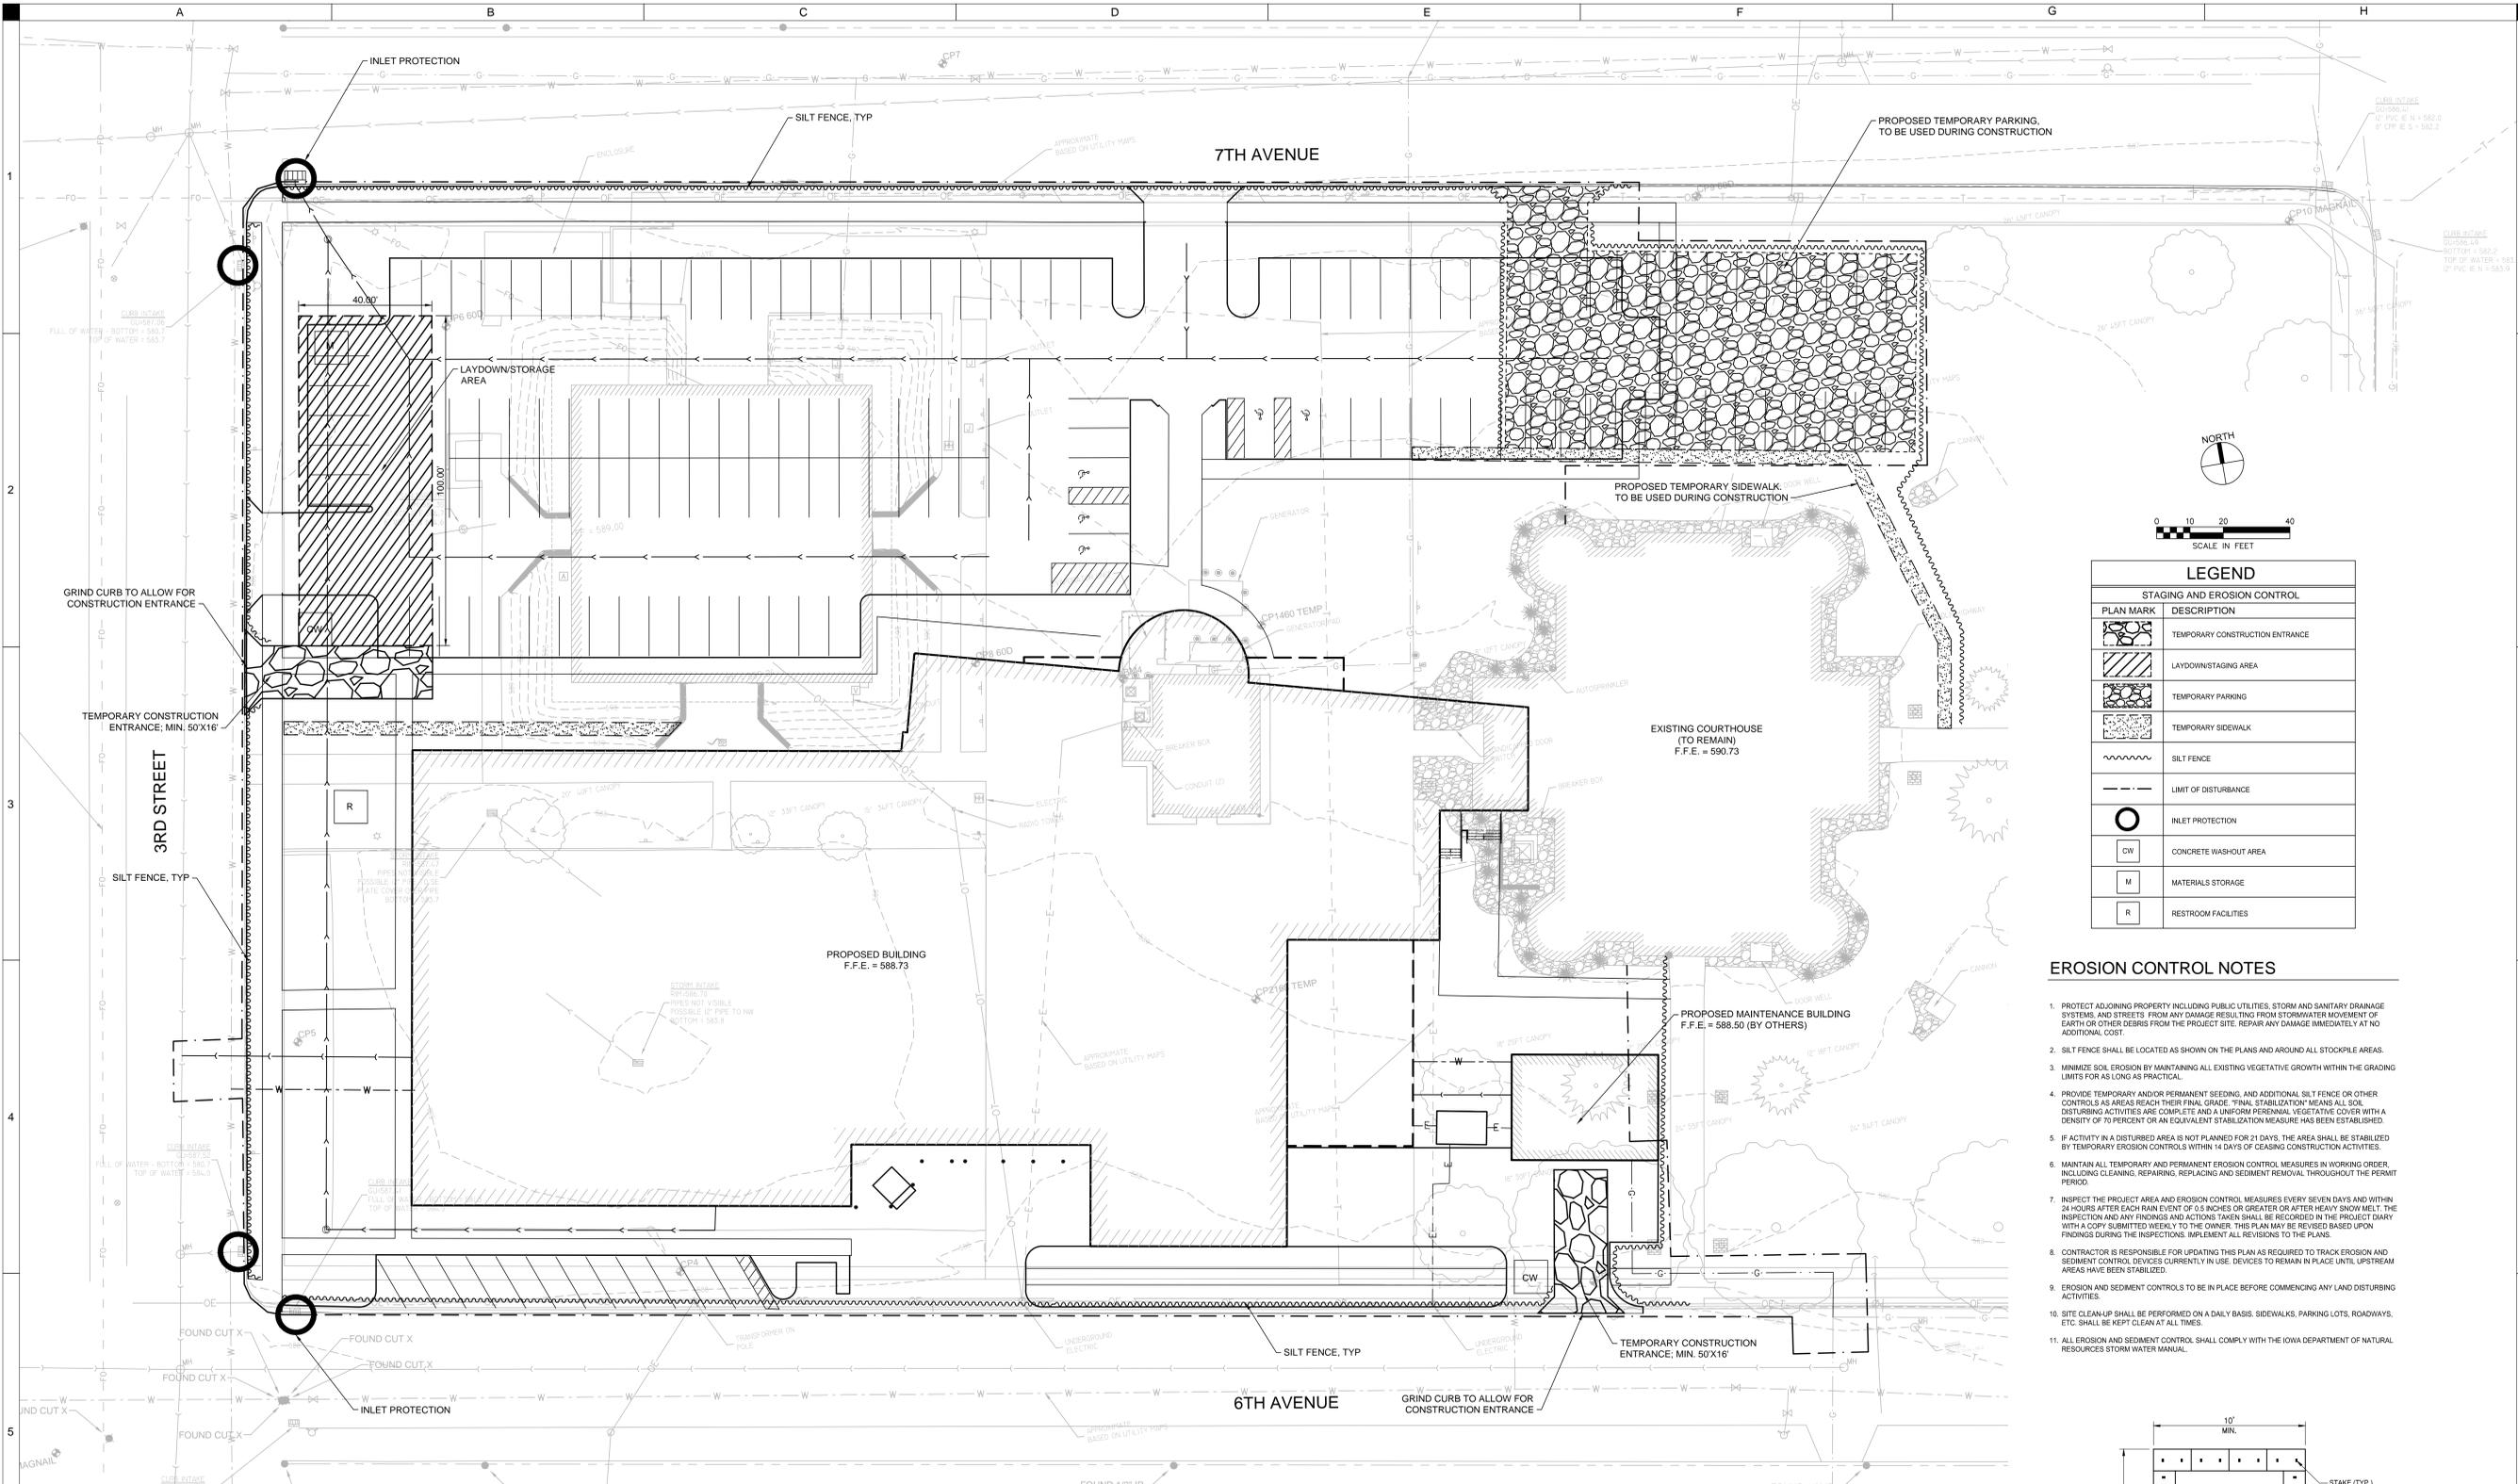

LEGEND	
PLAN MARK	DESCRIPTION
	TEMPORARY CONSTRUCTION ENTRANCE
	LAYDOWN/STAGING AREA
	TEMPORARY PARKING
	TEMPORARY SIDEWALK
	SILT FENCE
	LIMIT OF DISTURBANCE
	INLET PROTECTION
	CONCRETE WASHOUT AREA
	MATERIALS STORAGE
	RESTROOM FACILITIES

**EROSION CONTROL NOTES**

- PROTECT ADJACENT PROPERTY INCLUDING PUBLIC UTILITIES, STORM AND SANITARY DRAINAGE SYSTEMS, AND STREETS FROM ANY DAMAGE RESULTING FROM STORMWATER MOVEMENT OF EARTH OR OTHER DEBRIS FROM THE PROJECT SITE. REPAIR ANY DAMAGE IMMEDIATELY AT NO ADDITIONAL COST.
- SILT FENCE SHALL BE LOCATED AS SHOWN ON THE PLANS AND AROUND ALL STOCKPILE AREAS.
- MINIMIZE SOIL EROSION BY MAINTAINING ALL EXISTING VEGETATIVE GROUND WITHIN THE GRADING LIMITS FOR AS LONG AS PRACTICAL.
- PROVIDE TEMPORARY AND/OR PERMANENT SEEDING, AND ADDITIONAL SILT FENCE OR OTHER CONTROLS AS AREAS REACH THEIR FINAL GRADE. "FINAL STABILIZATION" MEANS ALL SOIL DISTURBING ACTIVITIES ARE COMPLETE AND A UNIFORM PERMANENT VEGETATIVE COVER WITH A DENSITY OF 70 PERCENT OR AN EQUIVALENT STABILIZATION MEASURE HAS BEEN ESTABLISHED.
- IF ACTIVITY IN A DISTURBED AREA IS NOT PLANNED FOR 21 DAYS, THE AREA SHALL BE STABILIZED BY TEMPORARY EROSION CONTROLS WITHIN 14 DAYS OF CEASING CONSTRUCTION ACTIVITIES.
- MAINTAIN ALL TEMPORARY AND PERMANENT EROSION CONTROL MEASURES IN WORKING ORDER, INCLUDING CLEANING, REPAIRING, REPLACING AND SEDIMENT REMOVAL THROUGHOUT THE PERMIT PERIOD.
- INSPECT THE PROJECT AREA AND EROSION CONTROL MEASURES EVERY SEVEN DAYS AND WITHIN 24 HOURS AFTER EACH RAIN EVENT OF 0.5 INCHES OR GREATER OR AFTER HEAVY SNOW MELT. THE INSPECTION AND ANY FINDINGS AND ACTIONS TAKEN SHALL BE RECORDED IN THE PROJECT DIARY WITH A COPY SUBMITTED WEEKLY TO THE OWNER. THIS PLAN MAY BE REVISED BASED UPON FINDINGS DURING THE INSPECTIONS. IMPLEMENT ALL REVISIONS TO THE PLANS.
- CONTRACTOR IS RESPONSIBLE FOR UPDATING THIS PLAN AS REQUIRED TO TRACK EROSION AND SEDIMENT CONTROL DEVICES CURRENTLY IN USE. DEVICES TO REMAIN IN PLACE UNTIL UPSTREAM AREAS HAVE BEEN STABILIZED.
- EROSION AND SEDIMENT CONTROLS TO BE IN PLACE BEFORE COMMENCING ANY LAND DISTURBING ACTIVITIES.
- SITE CLEAN-UP SHALL BE PERFORMED ON A DAILY BASIS. SIDEWALKS, PARKING LOTS, ROADWAYS, ETC. SHALL BE KEPT CLEAN AT ALL TIMES.
- ALL EROSION AND SEDIMENT CONTROL SHALL COMPLY WITH THE IOWA DEPARTMENT OF NATURAL RESOURCES STORM WATER MANUAL.

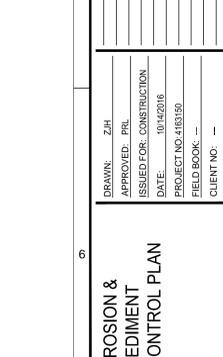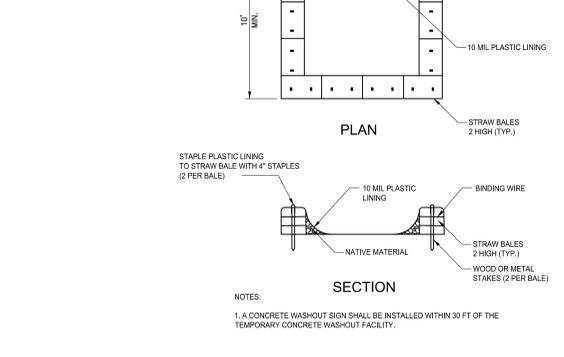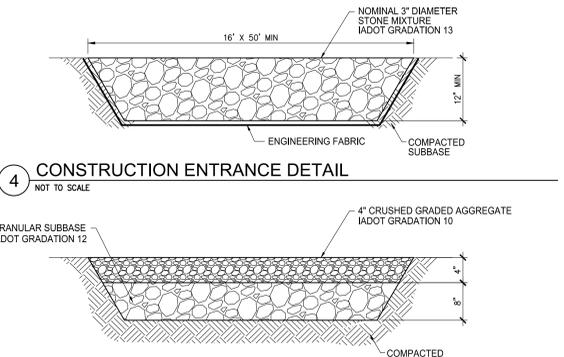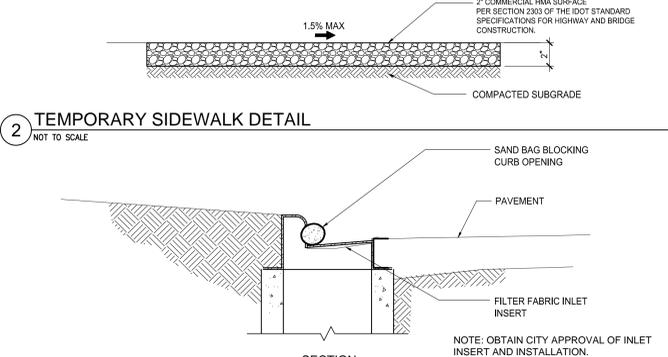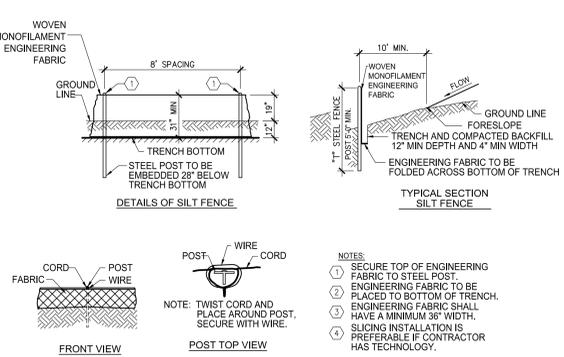

**EROSION & SEDIMENT CONTROL PLAN**

NOTES:  
1. A CONCRETE WASHOUT SIGN SHALL BE INSTALLED WITHIN 50 FT OF THE TEMPORARY CONCRETE WASHOUT FACILITY.